




# Model: ALH 125

## Technical Datasheet

24.10.2008


<b>Weight 1500.0Kg</b>	
<b>L.Hose 4000.0 mm</b>	
<b>D.Hose 125.0 mm</b>	
Dim.	mm
A	263.50
B	1273.00
C	1038.00
D	785.00
E	1750.00
F	1000.00
G	1140.00
H	500.00
I	1900.00
J	2000.00
K	27.00
L	-
M	300.00
N	232.00
O	Flange DN100 PN16
P	660.00
Q	500.00

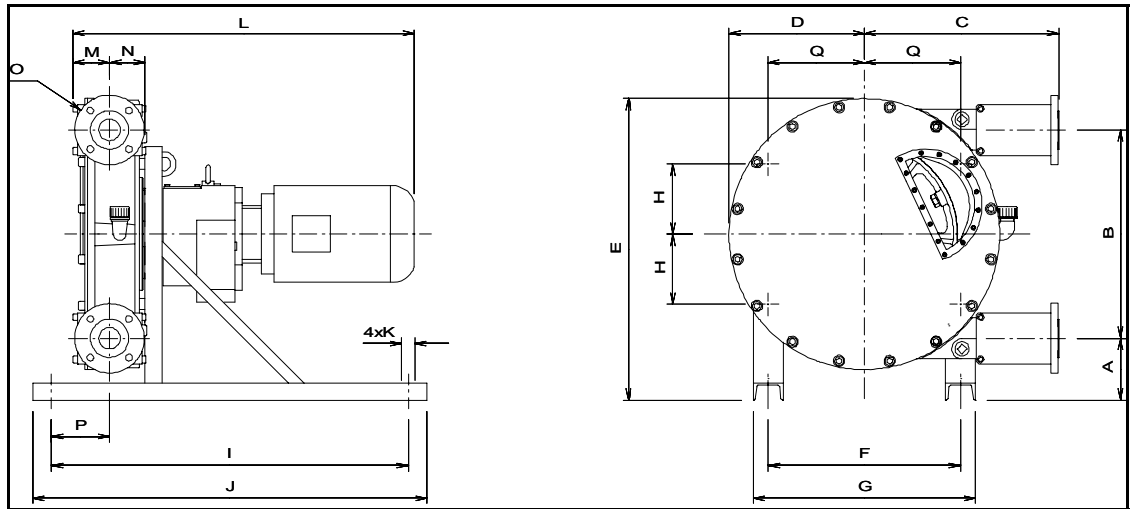

Shims Table

Pressure in bar (psi)	Speed in rpm	Number of shims
dP < 5 (72,5)	0 a 10	0
	10 a 35	0
5 (72,5) < dP < 7,5 (108,75)	0 a 10	2
	10 a 27,5	1
7,5 (108,75) < dP < 10	0 a 10	3
	10 a 25	2
10 (145) < dP < 15 (217,5)	0 a 10	4
	10 a 20	3

- Continuous
- \*Intermittent
- Forbidden

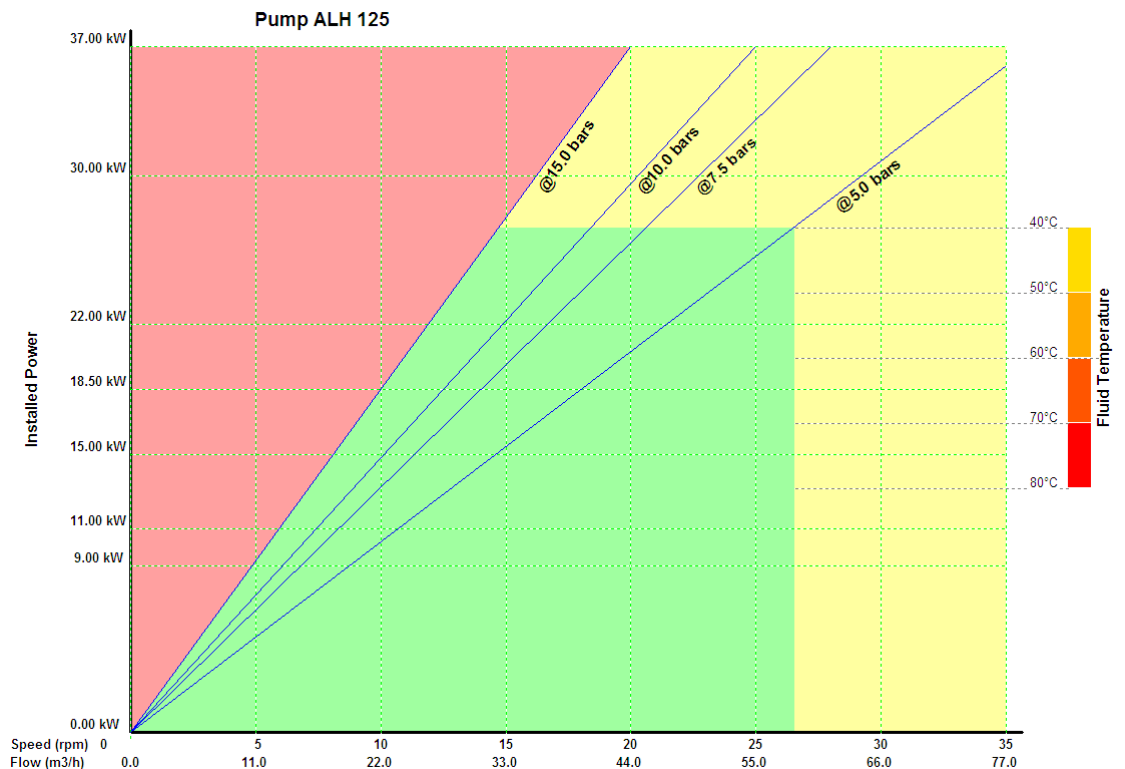

ALBIN PUMP SAS  
 ZAC de Fontgrave  
 F-26740 Montboucher  
 Tél: + 33 4 75 90 92 92  
 Fax: + 33 4 75 90 92 40  
 www.albinpump.fr  
 www.albinpump.com

\*Intermittent use is 2 hours max. continuous duty followed by 1 hour stop